

PowerStak™



Presto LIFTS

— The PowerStak™ Difference —

Presto PowerStak™ is a family of high performance, fully powered stackers that offer significant performance advantages over manual stackers without a significant price premium.

PowerStak Stackers provide instant flexibility and versatility. Whether used as a dedicated stacker, or as a combination stacker/work positioner, or as a transporter, they provide significant improvements in worker productivity. An abundance of ergonomic features make PowerStak Stackers the safest, easiest to operate powered stackers available. Sleek, stylish

design, low overall weight, and quiet operation allow them to fit nicely into a wide variety of work environments including: **warehouses, loading docks, light assembly work cells, retail sales floors and more.**

Nine PowerStak models are available to satisfy any requirement including servicing racks up to 12 feet high. Fork Over models can be used with open bottom pallets or skids and adjustable straddle units are available for use with any pallet style, even closed bottom.

*PowerStak
2,200 lb. Capacity*



NEW IN 2009
for Light Duty Applications
PowerStak Lite
1,500 lb. Capacity



*PowerStak Extended Mast
101", 125", 150" Lift Heights
2,200 lb. Capacity*



Offset handle and narrow mast design (62" mast only) provide a clear view with no "blind spots"



Adjustable fork carriage allows forks to be quickly repositioned to best accommodate loads (straddle only)




Ergonomic handle with auto reversing "belly bump" switch, comfort grip controls and switch redundancy for left or right hand operation

Straddle Design



Model	PPS1500-62NAS	PPS2200-62NAS	PPS2200-101AS	PPS2200-125AS	PPS2200-150AS
Lift Height	62"	62"	101"	125"	150"
Capacity	1,500 lbs.	2,200 lbs.	2,200 lbs.	2,200 lbs.	2,200 lbs.
Load Center	24"	24"	24"	24"	24"
Forks (adjustable welded)	42"	42"	42"	42"	42"
Individual Fork Width	6"	6"	6"	6"	6"
Min. Straddle I.D. (adjustable)	38" – 52"	38" – 52"	38" – 52"	38" – 52"	38" – 52"
Max. Overall Width (straddle legs)	46" – 60"	46" – 60"	46" – 60"	46" – 60"	46" – 60"
Overall Height	79"	79"	73"	83"	98-1/2"
Shipping Weight	982 lbs.	1,200 lbs.	1,405 lbs.	1,445 lbs.	1,545 lbs.
Lifting Speed (without load)	2.9" / sec.	3.9" / sec.	3.9" / sec.	3.9" / sec.	3.9" / sec.
Drive Motor	350 Watt	700 Watt	700 Watt	700 Watt	700 Watt
Battery (2)	12 volt 55 amp hr	12 volt 70 amp hr	12 volt 70 amp hr	12 volt 70 amp hr	12 volt 70 amp hr



Straddle legs feature simple user adjustability



Fork Over Design



Model	PPS1500-62NFO-21	PPS1500-62NFO-27	PPS2200-62NFO-21	PPS2200-62NFO-27
Lift Height	62"	62"	62"	62"
Capacity	1,500 lbs.	1,500 lbs.	2,200 lbs.	2,200 lbs.
Load Center	24"	24"	24"	24"
Fork Length	42"	42"	42"	42"
Individual Fork Width	6"	6"	6"	6"
Max. Distance Between Forks	8-1/2"	15"	9"	15"
Max. Overall Width of Forks	20-1/2"	27"	21"	27"
Overall Height	78"	78"	78"	78"
Overall Width	29-1/4"	29-1/4"	32"	32"
Shipping Weight	805 lbs.	805 lbs.	1,100 lbs.	1,100 lbs.
Lifting Speed (without load)	3.9" / sec.	3.9" / sec.	4.8" / sec.	4.8" / sec.
Drive Motor	350 Watt	350 Watt	700 Watt	700 Watt
Battery (2)	12 volt 55 amp hr	12 volt 55 amp hr	12 volt 70 amp hr	12 volt 70 amp hr



Options

PowerStak units are available with these standard options. Other options may be available. Not all options shown are available for every PowerStak Model. Consult factory for details.

Load Backrests - to prevent loads from shifting when raised to full height

Deep Cycle Battery - for extended duty cycles

Rubber Drive Wheel - for better traction on uneven surfaces


Non-Marking Rubber Drive Wheel - to prevent scuffing/markings of floors

Forged Forks - one piece construction for maximum strength and rigidity

PowerStak Counterbalance Stackers

Presto Counterbalance Stackers are ideal for die handling or machine feeding applications where straddle legs could get in the way. They can also be used for servicing rack or loading and unloading trucks. Unit comes standard with manual adjustable tilt mast.

Model	PPS 1100-62-CB
Lift Height	62"
Capacity	1,100 lbs.
Load Center	15"
Fork Length	30"
Individual Fork Width	3"
Overall Height	81"
Overall Width	32-1/4"
Lifting Speed (without load)	3.2" / sec.
Shipping Weight	1,797 lbs.
Battery (2)	12 volt 100 amp hr

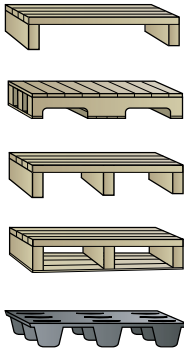

Works with any style pallet or skid, even closed bottom.



Other Presto Stackers




The PowerStak Warranty

Presto Lifts warrants the Power Stacker against defects in the welded structural frame and AC motors on lifts equipped with an AC power unit from faulty material and workmanship for a period of one (1) year from the date of invoice.

Presto Lifts warrants the Power Stacker against defects on the mast, fork carriage, chains, pumps, DC motors, controllers, switches, cylinders, battery chargers and wiring harnesses from faulty material and workmanship for a period of one (1) year from the date of invoice.

All wear items such as batteries, wheels, motor brushes, seals, bearings, hydraulic hoses and forks have a limited warranty against defects in faulty material and workmanship for a ninety (90) day period from the date of invoice and 30 day limited warranty on labor. Please note that authorization from Presto Lifts is required on all warranty work.



Dealer Imprint